


BASEMENT WATERPROOFING SYSTEM BUILTUP

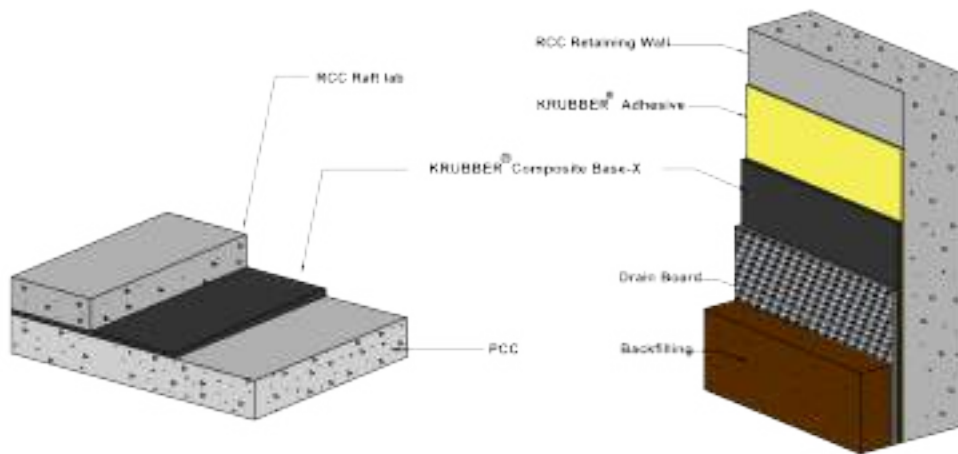

UNDERNEATH RAFT SLAB

EXTERNAL SURFACE OF RETAINING WALL

Product's Used:

KRUBBER® Composite Base-XH Membrane with elastomeric terpolymer core	For Raft slab and For Retaining wall (Confined) Composite membrane thickness: 1.8mm
KRUBBER® Composite Base-XV Membrane with elastomeric terpolymer core	For Retaining wall (Unconfined) Composite membrane thickness:1.5mm
KRUBBER® Adhesive for overlaps and vertical substrates	1 Liter covers approx. 2 Sq Mtrs
KRUBBER® Lap Seal for seam edges and penetrations	Approx. 10 Running Mtrs per 310ml Cartridge
KRUBBER® Drain board for protection cum drainage	8mm thick minimum
KRUBBER® Termination Bar on vertical surfaces	2" Aluminum bar.



Basement & foundation waterproofing

Pre-Fabricated Components

KRUBBER® I-Corner	Inward cornering
KRUBBER® O-Corner	Outward cornering
KRUBBER® Drain Seal	Sleeve Conduits, penetrations, openings, posts

Accessories

Grinder	To grind the substrate
Seam Roller	For pressing seams / overlap
Brush or Rollers	For applying Adhesive and Primer
Hard brush	To press the bonded membrane and remove entrapped air.
Sealant Gun	For KRUBBER® Lap Seal
Seam Probe Tester	To test overlap seams
Other General Accessories	Scissors, Blades, Measuring tapes, Stirrer, Masking tapes, Marking chinks, Drill machine and Screws.